

TYPE	HEIGHT in mm.	LENGTH in mm.	OUTPUT 55/45/20°C	OUTPUT 75/65/20°C
RI070.50	740	500	204 W.	382 W.
RI070.60	740	600	233 W.	437 W.
RI120.50	1140	500	338 W.	634 W.
RI120.60	1140	600	391 W.	733 W.
RI150.50	1500	500	450 W.	845 W.
RI150.60	1500	600	519 W.	974 W.
RI170.50	1700	500	507 W.	951 W.
RI170.60	1700	600	584 W.	1096 W.




TYPE	HEIGHT in mm.	LENGTH in mm.	ELECTRIC ELEMENT
RI070.50E	740	500	250 W.
RI070.60E	740	600	400 W.
RI120.50E	1140	500	600 W.
RI120.60E	1140	600	600 W.
RI150.50E	1500	500	800 W.
RI150.60E	1500	600	800 W.
RI170.50E	1700	500	800 W.
RI170.60E	1700	600	1000 W.



EL.AFSTAND.02
EL.BEDIENING.11
EL.BEDIENING.12
EL.BEDIENING.13

This radiator comes standard with the white EL.BEDIENING.08 thermostat. As an option, you can choose from the following:
Digital remote control
Round thermostat, white
Round thermostat, matte black
Round thermostat, chrome

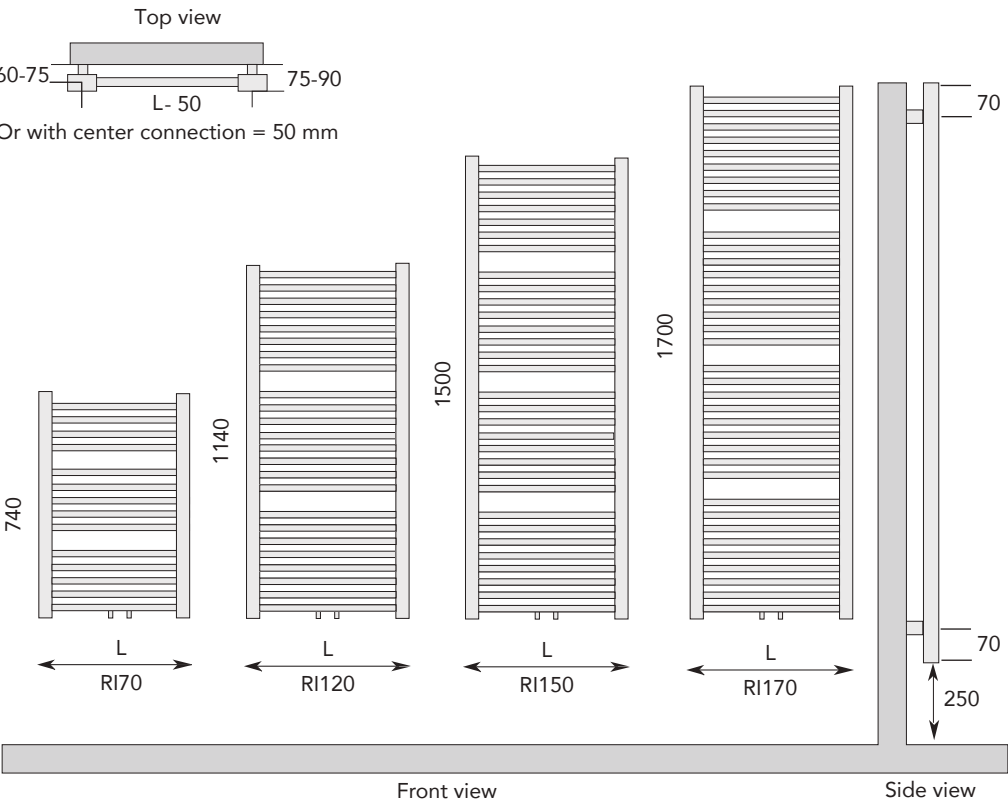

Standard connection:

IMPORTANT!
For top connection, a flow tube is necessary.

Maximum operating pressure: 10 bar
Exponent n: 1,25

