

TYPE	HOOGTE in mm.	LENGTE in mm.	AFGIFTE 55/45/20°C	AFGIFTE 75/65/20°C
RI070.50	740	500	204 W.	382 W.
RI070.60	740	600	233 W.	437 W.
RI120.50	1140	500	338 W.	634 W.
RI120.60	1140	600	391 W.	733 W.
RI150.50	1500	500	450 W.	845 W.
RI150.60	1500	600	519 W.	974 W.
RI170.50	1700	500	507 W.	951 W.
RI170.60	1700	600	584 W.	1096 W.




TYPE	HOOGTE in mm.	LENGTE in mm.	ELEKTRISCH ELEMENT
RI070.50E	740	500	250 W.
RI070.60E	740	600	400 W.
RI120.50E	1140	500	600 W.
RI120.60E	1140	600	600 W.
RI150.50E	1500	500	800 W.
RI150.60E	1500	600	800 W.
RI170.50E	1700	500	800 W.
RI170.60E	1700	600	1000 W.



EL.AFSTAND.02
EL.BEDIENING.11
EL.BEDIENING.12
EL.BEDIENING.13

Deze radiator wordt standaard geleverd met de witte thermostaat EL.BEDIENING.08 Als optie kan er gekozen worden voor:
Digitale afstandsbediening
Ronde thermostaat, wit
Ronde thermostaat, mat zwart
Ronde thermostaat, chroom

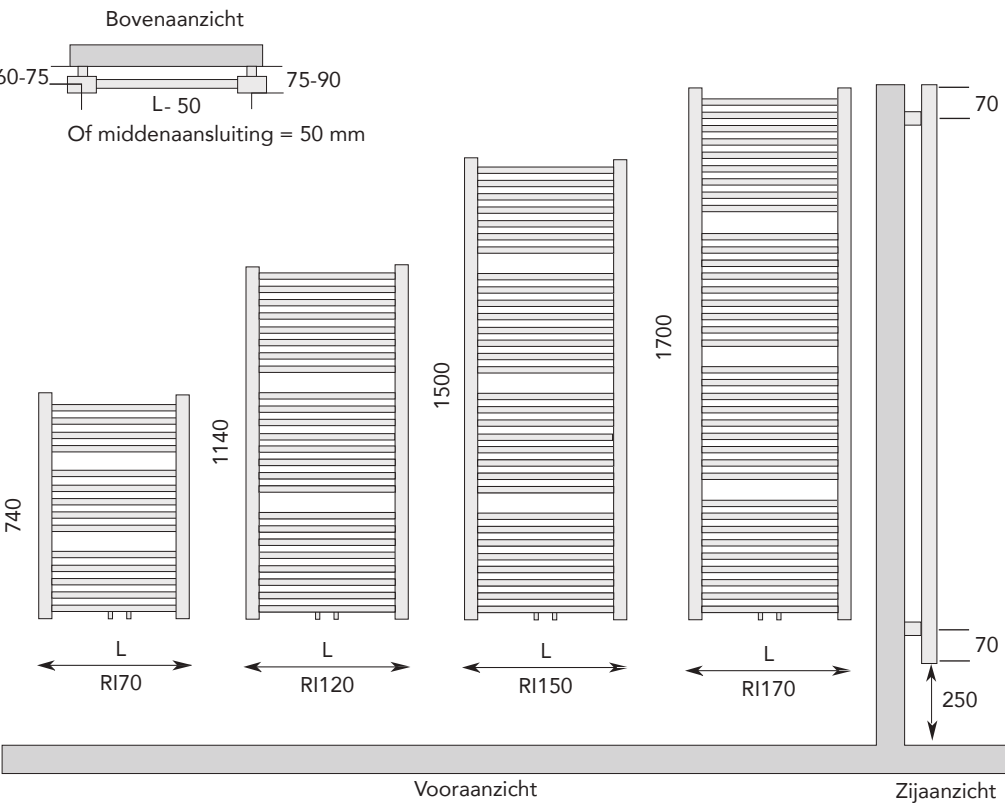

Standaard aansluiting:

LET OP!
Bij bovenaansluiting is een stijgbuis noodzakelijk

Maximale werkdruk: 10 bar
Exponent n: 1,25

