


TYPE	HEIGHT in mm.	LENGTH in mm.	OUTPUT 55/45/20°C	OUTPUT 75/65/20°C
EM100.40	1016	400	93 W.	242 W.
EM100.50	1016	500	117 W.	303 W.
EM160.40	1592	400	140 W.	364 W.
EM160.50	1592	500	175 W.	455 W.



TYPE	HEIGHT in mm.	LENGTH in mm.	ELECTRIC ELEMENT
EM100.40E	1016	400	200 W.
EM100.50E	1016	500	250 W.
EM160.40E	1592	400	350 W.
EM160.50E	1592	500	400 W.


eco
DESIGN
EL.AFSTAND.02
EL.BEDIENING.11
EL.BEDIENING.12
EL.BEDIENING.13

This radiator comes standard with the white EL.BEDIENING.08 thermostat. As an option, you can choose from the following:
Digital remote control
Round thermostat, white
Round thermostat, matte black
Round thermostat, chrome

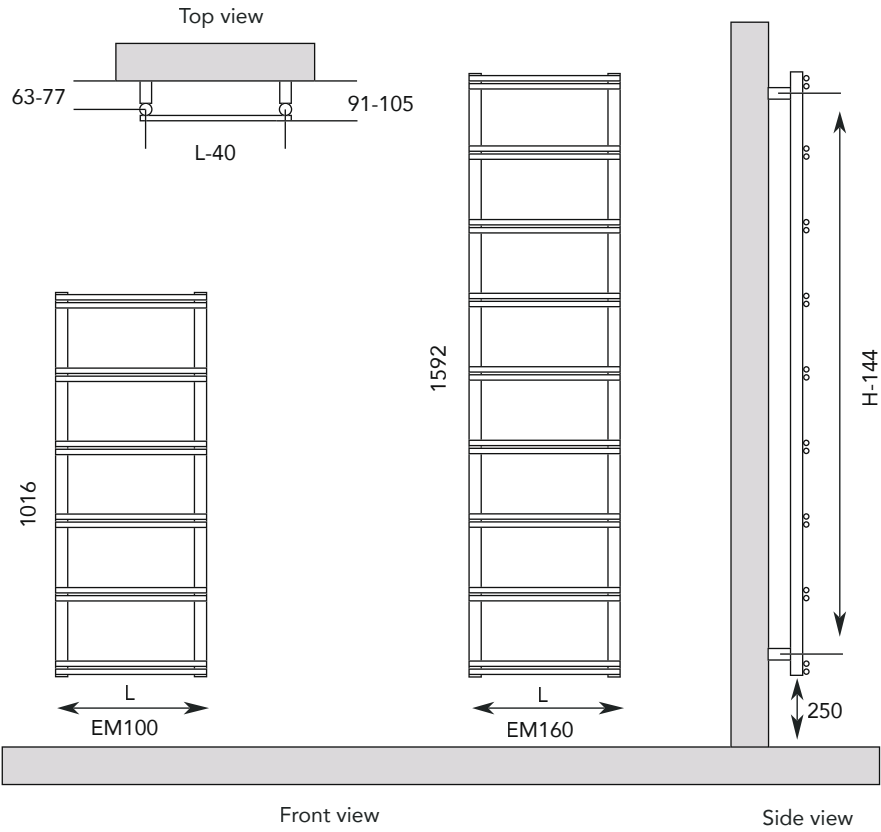

Standard connection:



If the radiator needs to be connected at the top, it can be turned upside down. This will change the appearance of the radiator.

IMPORTANT!
For top connection, a flow tube is necessary.

Maximum operating pressure: 10 bar
Exponent n: 1,23

