TYPE	HEIGHT in mm.	LENGTH in mm.	OUTPUT 55/45/20°C	OUTPUT 75/65/20°C
IK200.40	2070	400	287 W.	545 W.
IK200.50	2070	500	358 W.	680 W.

1			
	4	1	T
Side of the last		/	-


Maximum operating pressure: 10 bar Exponent n: 1,23




	in mm.	in mm.	ELEMENT
IK200.40E	2070	400	500 W.
IK200.50E	2070	500	600 W.

HEIGHT LENGTH ELECTRIC

The radiators come without a thermostat as standard. In this case, the radiators are intended for localized supplementary heating, towel warming, or as part of a centrally controlled heating system (not included). Optionally, a programmable thermostat can be chosen. In that case, the radiator can be used as the main heating source. The following options are available:

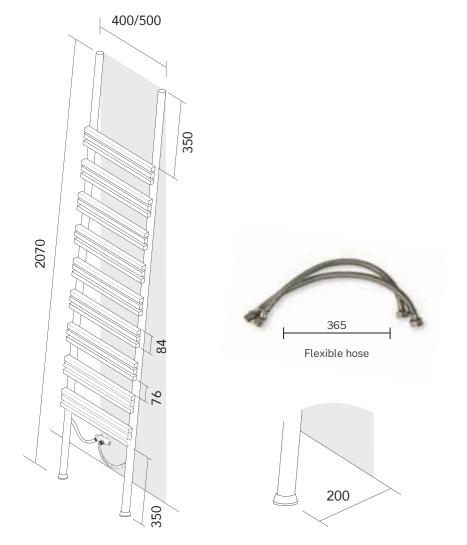

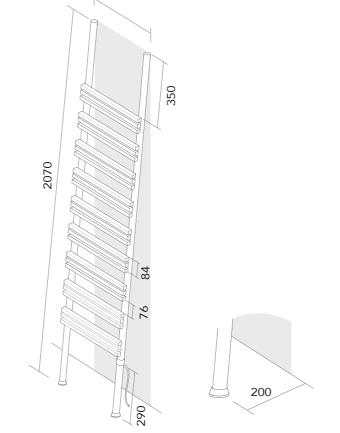



EL.BEDIENING.23 or EL.BEDIENING.24

