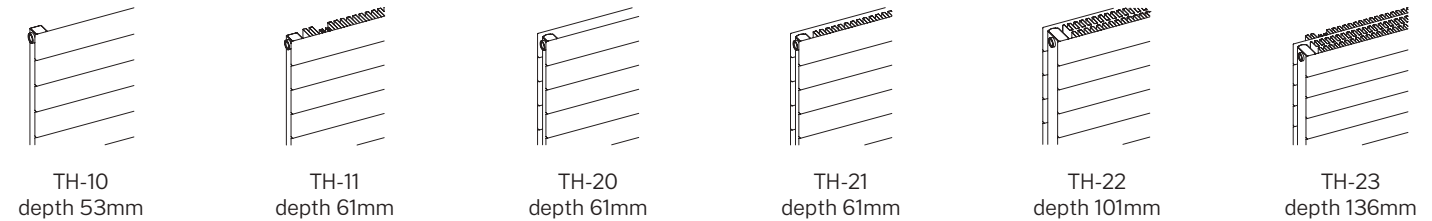
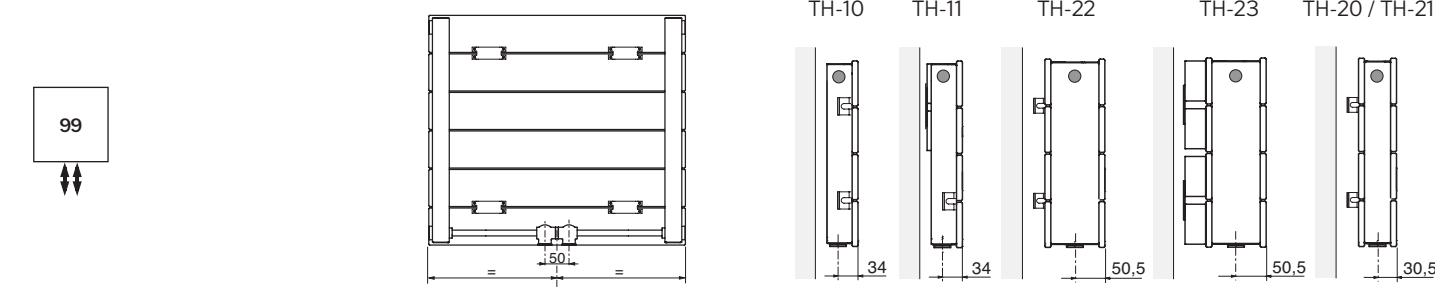
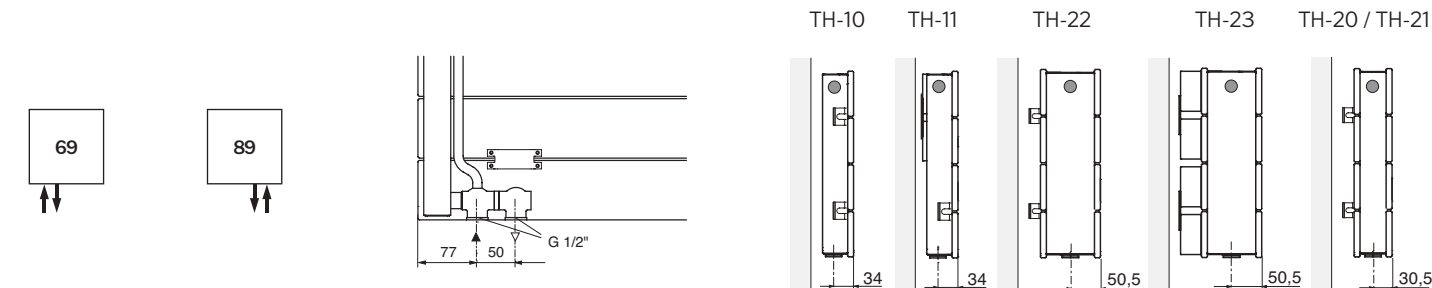
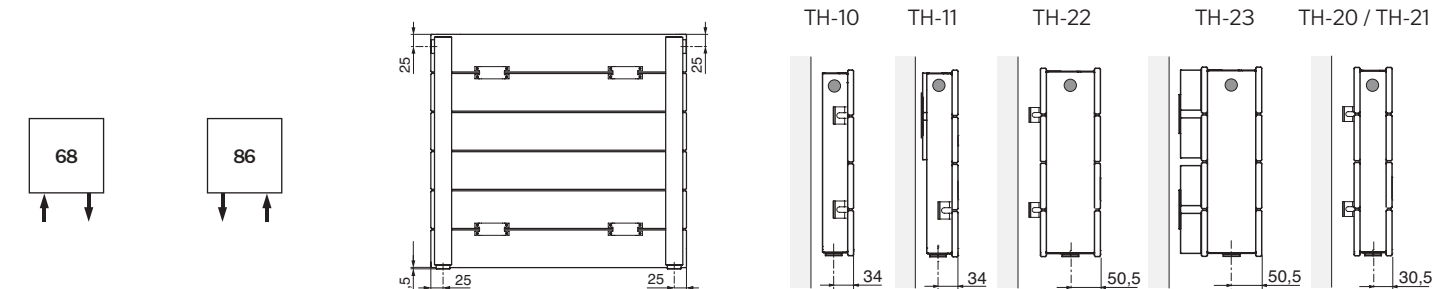
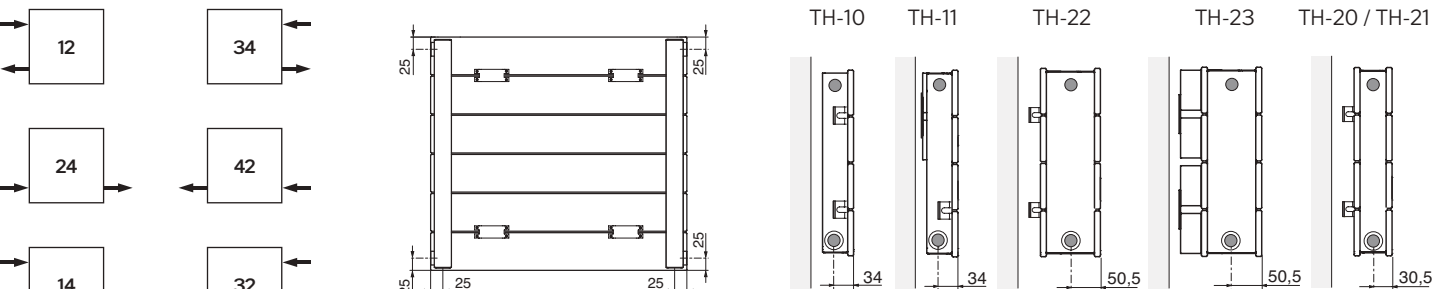




MODELS



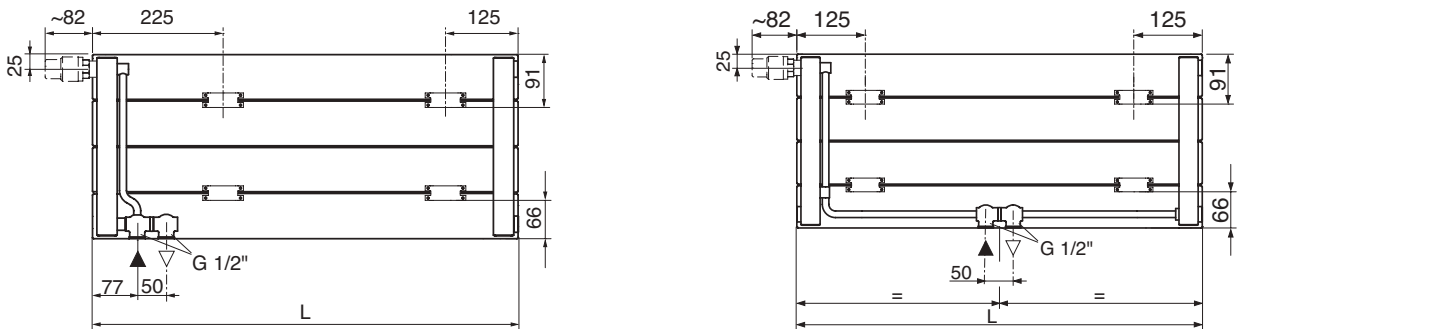
CONNECTION POSITIONS (always specify when ordering)



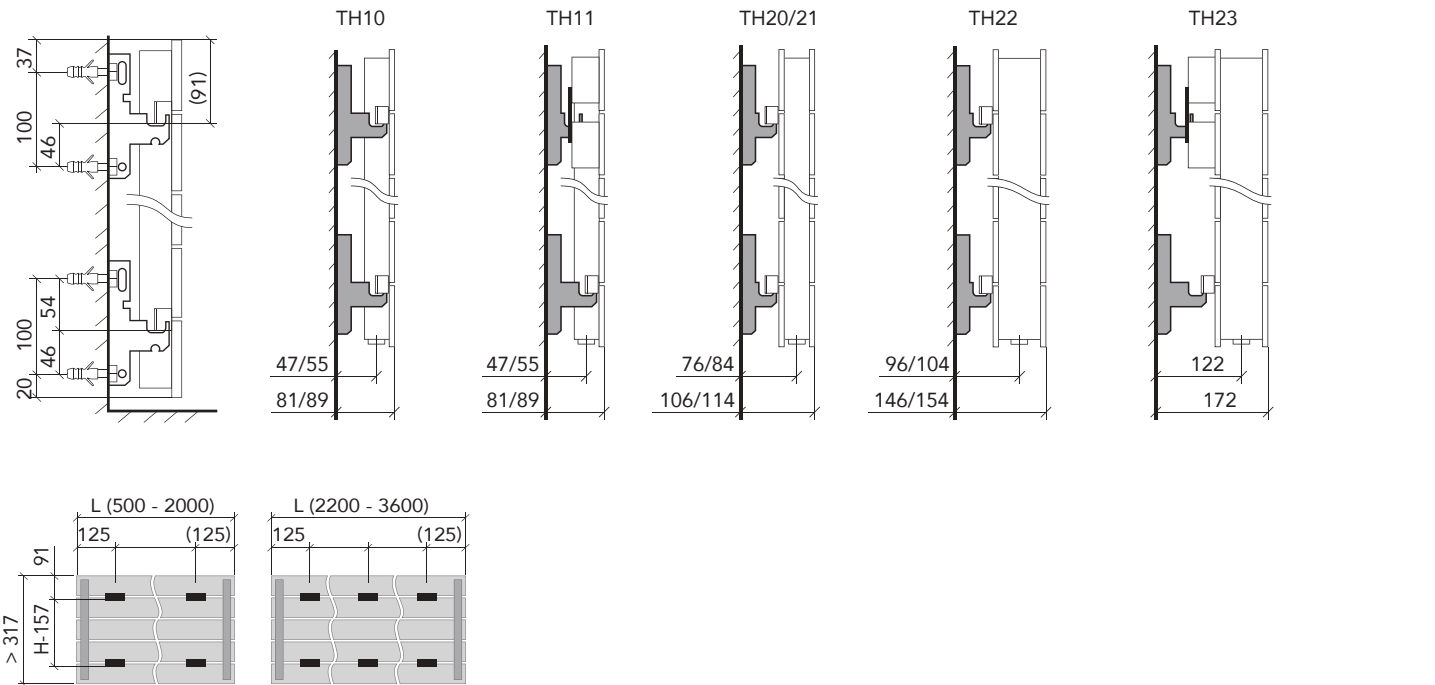
Connections for inlet and outlet are 1/2", and the air vent is 1/4". Other connection sizes are available upon request. The radiator does not come standard with a drain valve connection. However, if desired, it can be added to the order at no additional cost.

THERMOSTATIC VALVE

The panel TH can be equipped with an integrated thermostatic valve. This valve is located on the left or right side of the radiator (to be specified when ordering). The valve has an M30 x 1.5 coupling for the thermostat head. The thermostatic head is not included as standard.



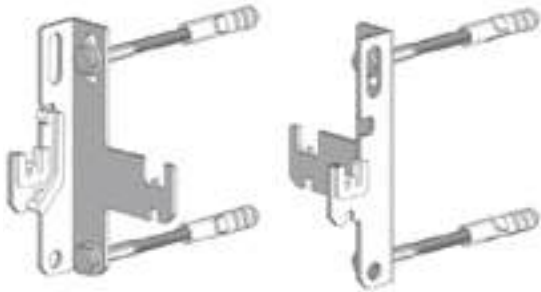
FIXING





BRACKETS (included as standard)

Wall bracket WT
Made of painted steel, supplied as a set of 4 or 6 brackets.
Complete with anti-lift security, rings, screws, and plugs.




COVER GRILLE


The PANEEL TH radiator comes with a standard cover grille.




TH-10 / TH-11



TH-22



TH-23




TH-20 / TH-21

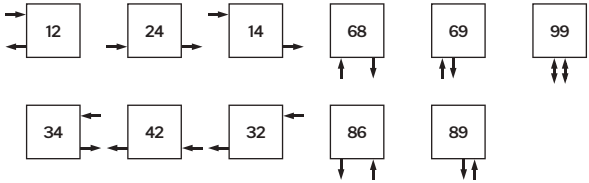
OPERATING PRESSURE

The standard working pressure for the PANEEL TH is 4 bar. If desired, these radiators can be supplied in a high-pressure version with a operating pressure of 10 bar. The additional cost for this is 10% of the price of the radiator in the standard color white. The test pressure is 1.3 times the operating pressure.

Height 400mm

						
M	TH40-10	TH40-11	TH40-20	TH40-21	TH40-22	TH40-23
H x D	397 x 53 mm	397 x 60 mm	397 x 61 mm	397 x 61 mm	397 x 101 mm	397 x 136 mm
C	3,4 L/m	3,4 L/m	5,7 L/m	5,7 L/m	6,9 L/m	6,9 L/m
W	11,1 kg/m	18,7 kg/m	21,2 kg/m	26,9 kg/m	33,4 kg/m	38,3 kg/m
R	50%	35%	35%	20%	20%	15%
Ex n	1,26	1,27	1,23	1,32	1,31	1,29

	M = Model		H x D = Height x Depth		C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
500	117	223	207	399	174	329	240	474	337	663	394	766
600	140	267	248	479	209	395	287	569	404	796	472	919
700	163	312	290	559	244	461	335	664	471	928	551	1072
800	186	356	331	638	278	526	383	758	538	1061	630	1226
900	210	401	373	718	313	592	431	853	606	1193	708	1379
1000	233	445	414	798	348	658	479	948	673	1326	787	1532
1100	256	490	455	878	383	724	527	1043	740	1459	866	1685
1200	280	534	497	958	418	790	575	1138	808	1591	944	1838
1300	303	579	538	1037	452	855	623	1232	875	1724	1023	1992
1400	326	623	580	1117	487	921	671	1327	942	1856	1102	2145
1500	350	668	621	1197	522	987	719	1422	1010	1989	1181	2298
1600	373	712	662	1277	557	1053	766	1517	1077	2122	1259	2451
1700	396	757	704	1357	592	1119	814	1612	1144	2254	1338	2604
1800	419	801	745	1436	626	1184	862	1706	1211	2387	1417	2758
1900	443	846	787	1516	661	1250	910	1801	1279	2519	1495	2911
2000	466	890	828	1596	696	1316	958	1896	1346	2652	1574	3064
2200	513	979	911	1756	766	1448	1054	2086	1481	2917	1731	3370
2400	559	1068	994	1915	835	1579	1150	2275	1615	3182	1889	3677
2600	606	1157	1076	2075	905	1711	1245	2465	1750	3448	2046	3983
2800	652	1246	1159	2234	974	1842	1341	2654	1884	3713	2204	4290
3000	699	1335	1242	2394	1044	1974	1437	2844	2019	3978	2361	4596
3200	746	1424	1325	2554	1114	2106	1533	3034	2154	4243	2518	4902
3400	792	1513	1408	2713	1183	2237	1629	3223	2288	4508	2676	5209
3600	839	1602	1490	2873	1253	2369	1724	3413	2423	4774	2833	5515



Connections:
PLEASE NOTE! Always specify when placing an order.
See description on page 166.



P.280










P.288

Accessories:
Refer to pages 288 - 295:
ACCKNOP02 ACCREK02
ACCKNOP08 ACCREK08

Brackets and cover grille:
All radiators come standardly with brackets and cover grille.

Colors:
The white price applies to RAL 9016. The color price applies to the colors from the color palette and color chart, section:  

Height 480mm																		
     																		
M	TH48-10			TH48-11			TH48-20			TH48-21			TH48-22			TH48-23		
H x D	477 x 53 mm			477 x 60 mm			477 x 60 mm			477 x 60 mm			477 x 101 mm			477 x 136 mm		
C	4,1 L/m			4,1 L/m			6,9 L/m			6,9 L/m			8,3 L/m			8,3 L/m		
W	13,8 kg/m			22,9 kg/m			26 kg/m			32,4 kg/m			40,2 kg/m			46,2 kg/m		
R	50%			35%			35%			20%			20%			15%		
Ex n	1,26			1,28			1,25			1,34			1,33			1,30		
M = Model				H x D = Height x Depth				C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n				
Length in mm	Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20	
500	139	266		239	464		205	389		275	550		397	788		461	900	
600	167	319		287	557		245	467		329	659		476	946		553	1080	
700	195	372		335	650		286	545		384	769		556	1103		645	1260	
800	222	426		382	742		327	622		439	879		635	1261		737	1440	
900	250	479		430	835		368	700		494	989		715	1418		829	1620	
1000	278	532		478	928		409	778		549	1099		794	1576		921	1800	
1100	306	585		526	1021		450	856		604	1209		873	1734		1013	1980	
1200	334	638		574	1114		491	934		659	1319		953	1891		1105	2160	
1300	361	692		621	1206		532	1011		714	1429		1032	2049		1197	2340	
1400	389	745		669	1299		573	1089		769	1539		1112	2206		1289	2520	
1500	417	798		717	1392		614	1167		824	1649		1191	2364		1382	2700	
1600	445	851		765	1485		654	1245		878	1758		1270	2522		1474	2880	
1700	473	904		813	1578		695	1323		933	1868		1350	2679		1566	3060	
1800	500	958		860	1670		736	1400		988	1978		1429	2837		1658	3240	
1900	528	1011		908	1763		777	1478		1043	2088		1509	2994		1750	3420	
2000	556	1064		956	1856		818	1556		1098	2198		1588	3152		1842	3600	
2200	612	1170		1052	2042		900	1712		1208	2418		1747	3467		2026	3960	
2400	667	1277		1147	2227		982	1867		1318	2638		1906	3782		2210	4320	
2600	723	1383		1243	2413		1063	2023		1427	2857		2064	4098		2395	4680	
2800	778	1490		1338	2598		1145	2178		1537	3077		2223	4413				
3000	834	1596		1434	2784		1227	2334		1647	3297		2382	4728				
3200	890	1702		1530	2970		1309	2490		1757	3517		2541	5043				
3400	945	1809		1625	3155		1391	2645		1867	3737		2700	5358				
3600	1001	1915		1721	3341		1472	2801		1976	3956							

Height 560mm																		
     																		
M	TH56-10			TH56-11			TH56-20			TH56-21			TH56-22			TH56-23		
H x D	557 x 53 mm			557 x 60 mm			557 x 61 mm			557 x 61 mm			557 x 101 mm			557 x 136 mm		
C	4,8 L/m			4,8 L/m			8,1 L/m			8,1 L/m			9,7 L/m			9,7 L/m		
W	16,4 kg/m			27,1 kg/m			30,7 kg/m			38 kg/m			47 kg/m			54 kg/m		
R	50%			35%			35%			20%			20%			15%		
Ex n	1,26			1,30			1,26			1,36			1,34			1,31		
M = Model				H x D = Height x Depth				C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n				
Length in mm	Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20	
500	162	310		271	530		237	454		309	625		456	913		527	1034	
600	194	371		325	635		284	544		371	749		547	1096		632	1240	
700	226	433		379	741		332	635		433	874		638	1278		737	1447	
800	258	495		434	847		379	726		494	999		730	1461		842	1654	
900	291	557		488	953		427	816		556	1124		821	1643		948	1860	
1000	323	619		542	1059		474	907		618	1249		912	1826		1053	2067	
1100	355	681		596	1165		521	998		680	1374		1003	2009		1158	2274	
1200	388	743		650	1271		569	1088		742	1499		1094	2191		1264	2480	
1300	420	805		705	1377		616	1179		803	1624		1186	2374		1369	2687	
1400	452	867		759	1483		664	1270		865	1749		1277	2556		1474	2894	
1500	485	929		813	1589		711	1361		927	1874		1368	2739		1580	3101	
1600	517	990		867	1694		758	1451		989	1998		1459	2922		1685	3307	
1700	549	1052		921	1800		806	1542		1051	2123		1550	3104		1790	3514	
1800	581	1114		976	1906		853	1633		1112	2248		1642	3287		1895	3721	
1900	614	1176		1030	2012		901	1723		1174	2373		1733	3469		2001	3927	
2000	646	1238		1084	2118		948	1814		1236	2498		1824	3652		2106	4134	
2200	711	1362		1192	2330		1043	1995		1360	2748		2006	4017		2317	4547	
2400	775	1486		1301	2542		1138	2177		1483	2998		2189	4382				
2600	840	1609		1409	2753		1232	2358		1607	3247		2371	4748				
2800	904	1733		1518	2965		1327	2540		1730	3497							
3000	969	1857		1626	3177		1422	2721		1854	3747							
3200	1034	1981		1734	3389		1517	2902		1978	3997							
3400	1098	2105		1843	3601		1612	3084										
3600	1163	2228		1951	3812		1706	3265										



P.280



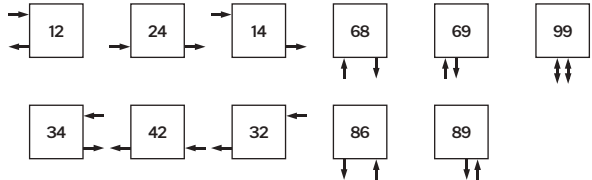
P.288




Accessories:
Refer to pages 288 - 295:
ACCKNOP02 ACCREK02
ACCKNOP08 ACCREK08





Brackets and cover grille:
All radiators come standardly
with brackets and cover grille.

Colors:
The white price applies to RAL 9016. The color
price applies to the colors from the color palette
and color chart, section:

Connections:
*PLEASE NOTE! Always specify
when placing an order.*
See description on page 166.



Height 640mm																		
     																		
M	TH64-10			TH64-11			TH64-20			TH64-21			TH64-22			TH64-23		
H x D	637 x 53 mm			637 x 60 mm			637 x 61 mm			637 x 61 mm			637 x 101 mm			637 x 136 mm		
C	5,5 L/m			5,5 L/m			9,3 L/m			9,3 L/m			11 L/m			11 L/m		
W	19,1 kg/m			30,9 kg/m			35,5 kg/m			43,4 kg/m			53,6 kg/m			62,2 kg/m		
R	50%			35%			35%			20%			20%			15%		
Ex n	1,26			1,30			1,27			1,36			1,35			1,32		
M = Model				H x D = Height x Depth				C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n				
Length in mm	Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20	
500	184	353		297	581		272	523		335	677		495	993		575	1139	
600	220	423		356	697		326	628		401	812		593	1192		690	1367	
700	257	494		415	813		380	732		468	947		692	1390		805	1595	
800	294	564		474	930		434	837		535	1082		791	1589		920	1822	
900	330	635		534	1046		489	941		602	1218		890	1787		1035	2050	
1000	367	705		593	1162		543	1046		669	1353		989	1986		1150	2278	
1100	404	776		652	1278		597	1151		736	1488		1088	2185		1265	2506	
1200	440	846		712	1394		652	1255		803	1624		1187	2383		1380	2734	
1300	477	917		771	1511		706	1360		870	1759		1286	2582		1495	2961	
1400	514	987		830	1627		760	1464		937	1894		1385	2780		1610	3189	
1500	551	1058		890	1743		815	1569		1004	2030		1484	2979		1725	3417	
1600	587	1128		949	1859		869	1674		1070	2165		1582	3178		1840	3645	
1700	624	1199		1008	1975		923	1778		1137	2300		1681	3376		1955	3873	
1800	661	1269		1067	2092		977	1883		1204	2435		1780	3575		2070	4100	
1900	697	1340		1127	2208		1032	1987		1271	2571		1879	3773		2185	4328	
2000	734	1410		1186	2324		1086	2092		1338	2706		1978	3972		2300	4556	
2200	807	1551		1305	2556		1195	2301		1472	2977		2176	4369				
2400	881	1692		1423	2789		1303	2510		1606	3247		2374	4766				
2600	954	1833		1542	3021		1412	2720		1739	3518							
2800	1028	1974		1660	3254		1520	2929		1873	3788							
3000	1101	2115		1779	3486		1629	3138										
3200	1174	2256		1898	3718		1738	3347										
3400	1248	2397		2016	3951		1846	3556										
3600	1321	2538		2135	4183		1955	3766										

Height 720mm																		
     																		
M	TH72-10			TH72-11			TH72-20			TH72-21			TH72-22			TH72-23		
H x D	717 x 53 mm			717 x 60 mm			717 x 61 mm			717 x 61 mm			717 x 101 mm			717 x 136 mm		
C	6,2 L/m			6,2 L/m			10,5 L/m			10,5 L/m			12,4 L/m			12,4 L/m		
W	21,8 kg/m			34,7 kg/m			40,2 kg/m			48,8 kg/m			60,2 kg/m			70,3 kg/m		
R	50%			35%			35%			20%			20%			15%		
Ex n	1,26			1,31			1,28			1,36			1,35			1,34		
M = Model				H x D = Height x Depth				C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n				
Length in mm	Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20	
500	206	396		322	633		310	600		360	728		533	1073		622	1244	
600	247	475		386	759		371	719		431	874		640	1287		746	1493	
700	288	554		451	886		433	839		503	1019		746	1502		871	1742	
800	330	633		515	1012		495	959		575	1165		853	1716		995	1990	
900	371	712		580	1139		557	1079		647	1310		959	1931		1120	2239	
1000	412	791		644	1265		619	1199		719	1456		1066	2145		1244	2488	
1100	453	870		708	1392		681	1319		791	1602		1173	2360		1368	2737	
1200	494	949		773	1518		743	1439		863	1747		1279	2574		1493	2986	
1300	536	1028		837	1645		805	1559		935	1893		1386	2789		1617	3234	
1400	577	1107		902	1771		867	1679		1007	2038		1492	3003		1742	3483	
1500	618	1187		966	1898		929	1799		1079	2184		1599	3218		1866	3732	
1600	659	1266		1030	2024		990	1918		1150	2330		1706	3432		1990	3981	
1700	700	1345		1095	2151		1052	2038		1222	2475		1812	3647		2115	4230	
1800	742	1424		1159	2277		1114	2158		1294	2621		1919	3861		2239	4478	
1900	783	1503		1224	2404		1176	2278		1366	2766		2025	4076				
2000	824	1582		1288	2530		1238	2398		1438	2912		2132	4290				
2200	906	1740		1417	2783		1362	2638		1582	3203							
2400	989	1898		1546	3036		1486	2878		1726	3494							
2600	1071	2057		1674	3289		1609	3117										
2800	1154	2215		1803	3542		1733	3357										
3000	1236	2373		1932	3795		1857	3597										
3200	1318	2531		2061	4048		1981	3837										
3400	1401	2689		2190	4301		2105	4077										
3600	1483	2848		2318	4554													

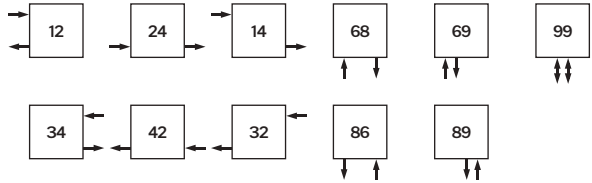





Accessories:
Refer to pages 288 - 295:
ACCKNOP02 ACCREK02
ACCKNOP08 ACCREK08





Brackets and cover grille:
All radiators come standardly
with brackets and cover grille.

Colors:
The white price applies to RAL 9016. The color
price applies to the colors from the color palette
and color chart, section:

Connections:
**PLEASE NOTE! Always specify
when placing an order.**
See description on page 166.



Height 800mm																			
     																			
M	TH80-10			TH80-11			TH80-20			TH80-21			TH80-22			TH80-23			
H x D	797 x 53 mm			797 x 60 mm			797 x 61 mm			797 x 61 mm			797 x 101 mm			797 x 136 mm			
C	7 L/m			7 L/m			11,4 L/m			11,4 L/m			13,8 L/m			13,8 L/m			
W	24,2 kg/m			38,5 kg/m			44,7 kg/m			54,2 kg/m			66,8 kg/m			78,5 kg/m			
R	50%			35%			35%			20%			20%			15%			
Ex n	1,28			1,31			1,28			1,37			1,36			1,36			
M = Model				H x D = Height x Depth				C = Capacity				W = Weight		R = Radiation share		Ex n = Exponent n			
Length in mm	Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		
500	226	438		348	684		342	663		385	780		571	1153		669	1349		
600	271	526		417	821		410	795		462	936		685	1383		802	1619		
700	316	613		487	958		478	928		539	1092		799	1614		936	1889		
800	362	701		556	1094		546	1060		616	1248		914	1844		1070	2158		
900	407	788		626	1231		615	1193		693	1404		1028	2075		1203	2428		
1000	452	876		695	1368		683	1325		770	1560		1142	2305		1337	2698		
1100	497	964		765	1505		751	1458		847	1716		1256	2536		1471	2968		
1200	542	1051		834	1642		820	1590		924	1872		1370	2766		1604	3238		
1300	588	1139		904	1778		888	1723		1001	2028		1485	2997		1738	3507		
1400	633	1226		973	1915		956	1855		1078	2184		1599	3227		1872	3777		
1500	678	1314		1043	2052		1025	1988		1155	2340		1713	3458		2006	4047		
1600	723	1402		1112	2189		1093	2120		1232	2496		1827	3688		2139	4317		
1700	768	1489		1182	2326		1161	2253		1309	2652		1941	3919					
1800	814	1577		1251	2462		1229	2385		1386	2808		2056	4149					
1900	859	1664		1321	2599		1298	2518		1463	2964		2170	4380					
2000	904	1752		1390	2736		1366	2650		1540	3120								
2200	994	1927		1529	3010		1503	2915		1694	3432								
2400	1085	2102		1668	3283		1639	3180											
2600	1175	2278		1807	3557		1776	3445											
2800	1266	2453		1946	3830		1912	3710											
3000	1356	2628		2085	4104		2049	3975											
3200	1446	2803		2224	4378														
3400	1537	2978		2363	4651														
3600	1627	3154																	

Height 880mm																
																
M	TH88-10			TH88-11		TH88-20		TH88-21		TH88-22		TH88-23				
H x D	877 x 53 mm			877 x 60 mm		877 x 61 mm		877 x 61 mm		877 x 101 mm		877 x 136 mm				
C	7,7 L/m			7,7 L/m		12,4 L/m		12,4 L/m		15,2 L/m		15,2 L/m				
W	26,6 kg/m			41,1 kg/m		49,1 kg/m		59,2 kg/m		72,3 kg/m		86 kg/m				
R	50%			35%		35%		20%		20%		15%				
Ex n	1,27			1,31		1,29		1,36		1,36		1,36				
M = Model				H x D = Height x Depth		C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n				
Length in mm	Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		Output 55/45/20	Output 75/65/20		
500	250	481		365	719		373	726		406	822		596	1204	701	1417
600	300	577		437	863		448	871		487	986		715	1445	841	1700
700	350	673		510	1007		522	1016		568	1151		834	1686	981	1983
800	400	769		583	1150		597	1161		650	1315		954	1926	1122	2266
900	450	865		656	1294		671	1306		731	1480		1073	2167	1262	2550
1000	500	961		729	1438		746	1451		812	1644		1192	2408	1402	2833
1100	550	1057		802	1582		821	1596		893	1808		1311	2649	1542	3116
1200	600	1153		875	1726		895	1741		974	1973		1430	2890	1682	3400
1300	650	1249		948	1869		970	1886		1056	2137		1550	3130	1823	3683
1400	700	1345		1021	2013		1044	2031		1137	2302		1669	3371	1963	3966
1500	750	1442		1094	2157		1119	2177		1218	2466		1788	3612	2103	4250
1600	800	1538		1166	2301		1194	2322		1299	2630		1907	3853		
1700	850	1634		1239	2445		1268	2467		1380	2795		2026	4094		
1800	900	1730		1312	2588		1343	2612		1462	2959		2146	4334		
1900	950	1826		1385	2732		1417	2757		1543	3124					
2000	1000	1922		1458	2876		1492	2902		1624	3288					
2200	1100	2114		1604	3164		1641	3192								
2400	1200	2306		1750	3451		1790	3482								
2600	1300	2499		1895	3739		1940	3773								
2800	1400	2691		2041	4026											
3000	1500	2883		2187	4314											
3200	1600	3075		2333	4602											
3400	1700	3267														
3600	1800	3460														



P.280



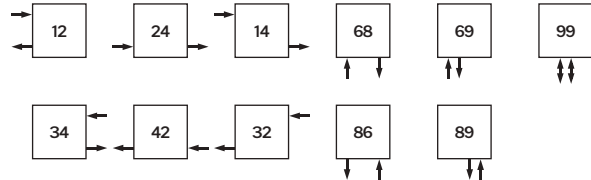
P.288

Accessories:
Refer to pages 288 - 295:
ACCKNOP02 ACCREK02
ACCKNOP08 ACCREK08





Brackets and cover grille:
All radiators come standardly
with brackets and cover grille.

Colors:
The white price applies to RAL 9016. The color
price applies to the colors from the color palette
and color chart, section:

Connections:
**PLEASE NOTE! Always specify
when placing an order.**
See description on page 166.



Height 960mm

							
M		TH96-10	TH96-11	TH96-20	TH96-21	TH96-22	TH96-23
H x D		957 x 53 mm	957 x 60 mm	957 x 61 mm	957 x 61 mm	957 x 101 mm	957 x 136 mm
C		8,5 L/m	8,5 L/m	13,3 L/m	13,3 L/m	16,6 L/m	16,6 L/m
W		29 kg/m	43,6 kg/m	53,6 kg/m	64,1 kg/m	77,9 kg/m	93,4 kg/m
R		50%	35%	35%	20%	20%	15%
Ex n		1,27	1,32	1,29	1,36	1,36	1,36

M = Model

H x D = Height x Depth

C = Capacity

W = Weight

R = Radiation share

Ex n = Exponent n

Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
500	272	523	382	754	404	788	428	864	622	1256	734	1484
600	326	628	458	905	485	945	513	1037	746	1507	880	1781
700	380	732	535	1056	566	1103	599	1210	870	1758	1027	2078
800	434	837	611	1206	646	1260	684	1382	994	2009	1174	2374
900	489	941	688	1357	727	1418	770	1555	1119	2260	1320	2671
1000	543	1046	764	1508	808	1575	855	1728	1243	2511	1467	2968
1100	597	1151	840	1659	889	1733	941	1901	1367	2762	1614	3265
1200	652	1255	917	1810	970	1890	1026	2074	1492	3013	1760	3562
1300	706	1360	993	1960	1050	2048	1112	2246	1616	3264	1907	3858
1400	760	1464	1070	2111	1131	2205	1197	2419	1740	3515	2054	4155
1500	815	1569	1146	2262	1212	2363	1283	2592	1865	3767		
1600	869	1674	1222	2413	1293	2520	1368	2765	1989	4018		
1700	923	1778	1299	2564	1374	2678	1454	2938				
1800	977	1883	1375	2714	1454	2835	1539	3110				
1900	1032	1987	1452	2865	1535	2993	1625	3283				
2000	1086	2092	1528	3016	1616	3150						
2200	1195	2301	1681	3318	1778	3465						
2400	1303	2510	1834	3619	1939	3780						
2600	1412	2720	1986	3921								
2800	1520	2929	2139	4222								
3000	1629	3138	2292	4524								
3200	1738	3347										
3400	1846	3556										
3600	1955	3766										

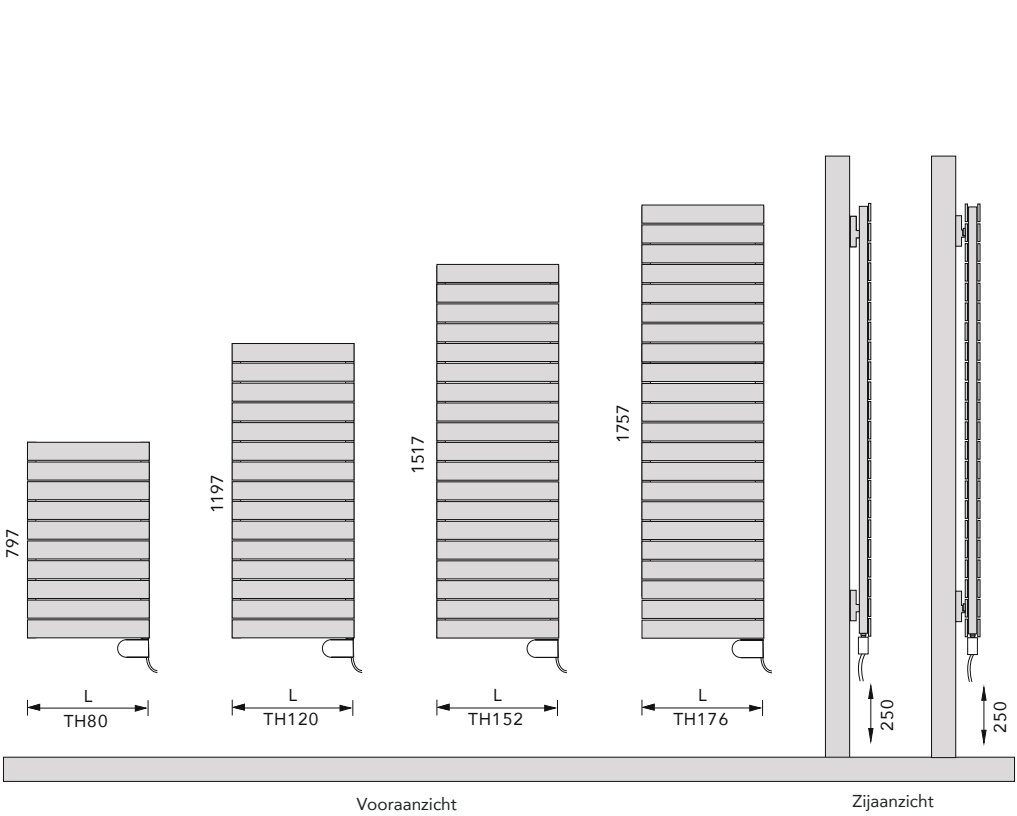


TYPE	HEIGHT In mm.	LENGTH in mm.	ELECTRIC ELEMENT
SINGLE VERSION TYPE 10			
TH80-10.050E	797	500	400 W.
TH120-10.050E	1197	500	600 W.
TH120-10.060E	1197	600	800 W.
TH152-10.050E	1517	500	800 W.
TH152-10.060E	1517	600	800 W.
TH152-10.075E	1517	750	1200 W.
TH176-10.050E	1757	500	800 W.
TH176-10.060E	1757	600	1200 W.
DOUBLE VERSION TYPE 20			
TH80-20.050E	797	500	600 W.
TH120-20.050E	1197	500	1200 W.
TH120-20.060E	1197	600	1200 W.
TH152-20.050E	1517	500	1200 W.
TH152-20.060E	1517	600	1500 W.
TH152-20.075E	1517	750	1500 W.
TH176-20.050E	1757	500	1200 W.
TH176-20.060E	1757	600	1500 W.

eco
DESIGN

EL.AFSTAND.02
EL.BEDIENING.11
EL.BEDIENING.12
EL.BEDIENING.13

This radiator comes standard with the white EL.BEDIENING.08 thermostat. As an option, you can choose from the following:
Digital remote control
Round thermostat, white
Round thermostat, matte black
Round thermostat, chrome



Accessories:
Refer to pages 288 - 295:
ACCKNOP02 ACCREK02
ACCKNOP08 ACCREK08

Brackets and cover grille:
All radiators come
standardly with brackets
and cover grille.

Colors:
The white price applies to RAL 9016. The color
price applies to the colors from the color
palette and color chart, section: 

Connections:
See description
on page 166.