



TYPE	HEIGHT in mm.	LENGTH in mm.	OUTPUT 55/45/20°C	OUTPUT 75/65/20°C
PL100.40	1016	400	250 W.	472 W.
PL100.50	1016	500	312 W.	591 W.
PL160.40	1592	400	384 W.	728 W.
PL160.50	1592	500	481 W.	911 W.

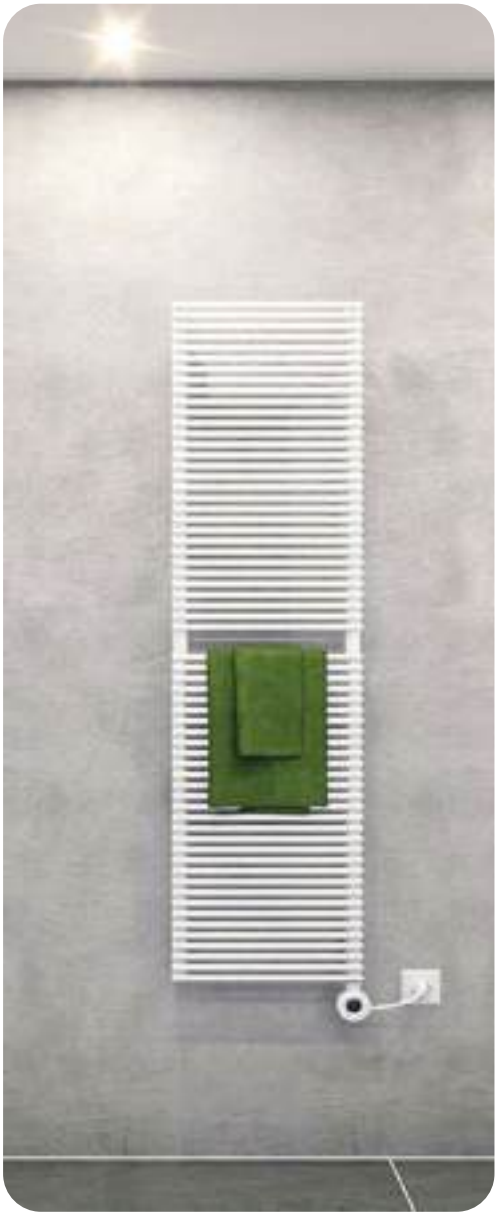

TYPE	HEIGHT in mm.	LENGTH in mm.	ELECTRIC ELEMENT
PL100.40E	1016	400	500 W.
PL100.50E	1016	500	600 W.
PL160.40E	1592	400	800 W.
PL160.50E	1592	500	900 W.


eco
DESIGN
EL.AFSTAND.02
EL.BEDIENING.11
EL.BEDIENING.12
EL.BEDIENING.13

This radiator comes standard with the white EL.BEDIENING.08 thermostat. As an option, you can choose from the following:
Digital remote control
Round thermostat, white
Round thermostat, matte black
Round thermostat, chrome

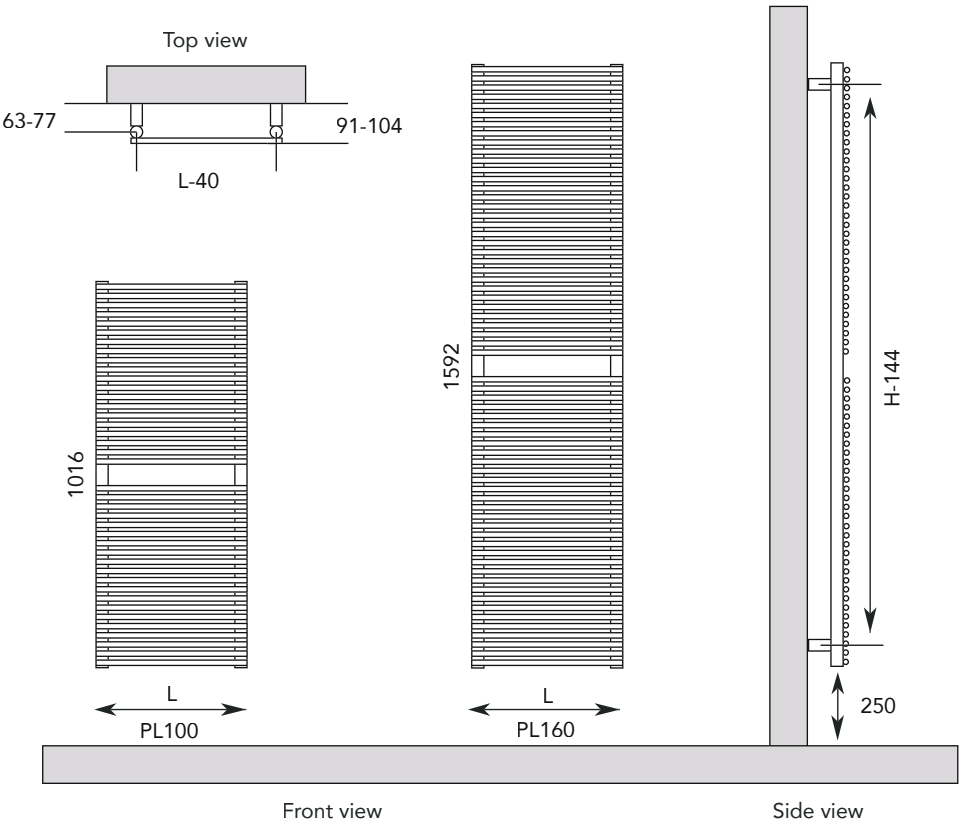

Standard connection:



If the radiator needs to be connected at the top, it can be turned upside down. This will change the appearance of the radiator.

IMPORTANT!
For top connection, a flow tube is necessary.

Maximum operating pressure: 10 bar
Exponent n: 1,23

