


TYPE	HEIGHT in mm.	LENGTH in mm.	OUTPUT 55/45/20°C	OUTPUT 75/65/20°C
P080.50	800	500	224 W.	416 W.
P080.60	800	600	267 W.	495 W.
P0120.40	1160	400	258 W.	479 W.
P0120.50	1160	500	319 W.	592 W.
P0120.60	1160	600	379 W.	704 W.
P0150.40	1520	400	332 W.	616 W.
P0150.50	1520	500	410 W.	761 W.
P0150.60	1520	600	488 W.	906 W.
P0190.40	1860	400	410 W.	761 W.
P0190.50	1860	500	498 W.	924 W.
P0190.60	1860	600	593 W.	1100 W.



TYPE	HEIGHT in mm.	LENGTH in mm.	ELECTRIC ELEMENT
P080.50E	800	500	350 W.
P080.60E	800	600	500 W.
P0120.40E	1160	400	500 W.
P0120.50E	1160	500	500 W.
P0120.60E	1160	600	700 W.
P0150.40E	1520	400	500 W.
P0150.50E	1520	500	700 W.
P0150.60E	1520	600	700 W.
P0190.40E	1860	400	700 W.
P0190.50E	1860	500	1000 W.
P0190.60E	1860	600	1000 W.


eco
DESIGN
EL.AFSTAND.02
EL.BEDIENING.11
EL.BEDIENING.12
EL.BEDIENING.13

This radiator comes standard with the white EL.BEDIENING.08 thermostat. As an option, you can choose from the following:
Digital remote control
Round thermostat, white
Round thermostat, matte black
Round thermostat, chrome

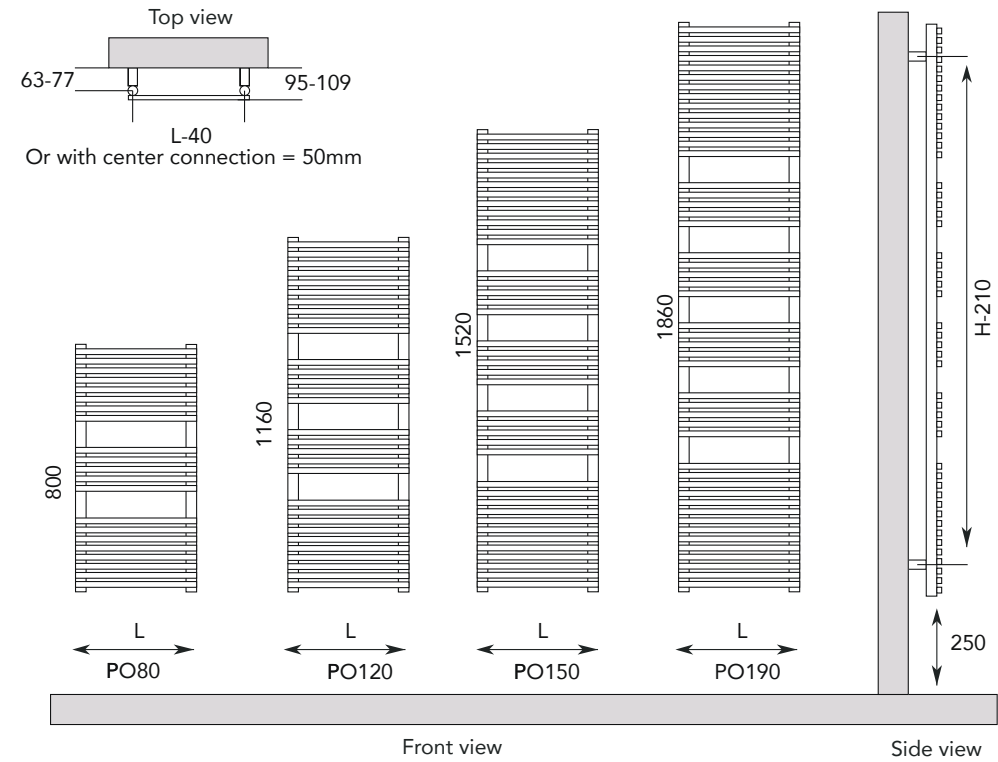

Standard connection: 68/86
Option: (specify when placing an order) 99

If the radiator needs to be connected at the top, it can be turned upside down. This will change the appearance of the radiator.

IMPORTANT!
For top connection, a flow tube is necessary.

Maximum operating pressure: 10 bar
Exponent n: 1,25

