




CONNECTION POSITIONS QUADRO HORIZONTAL QH

The QH model comes with 4 standard connections of 1/2". These 4 connections can be used as follows:

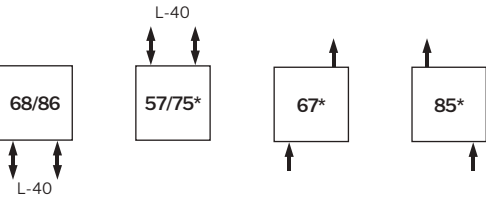


Additionally, for the QH model, there are several special connections available for an additional cost.




IMPORTANT! The desired connection position needs to be specified when placing an order!

FIXING

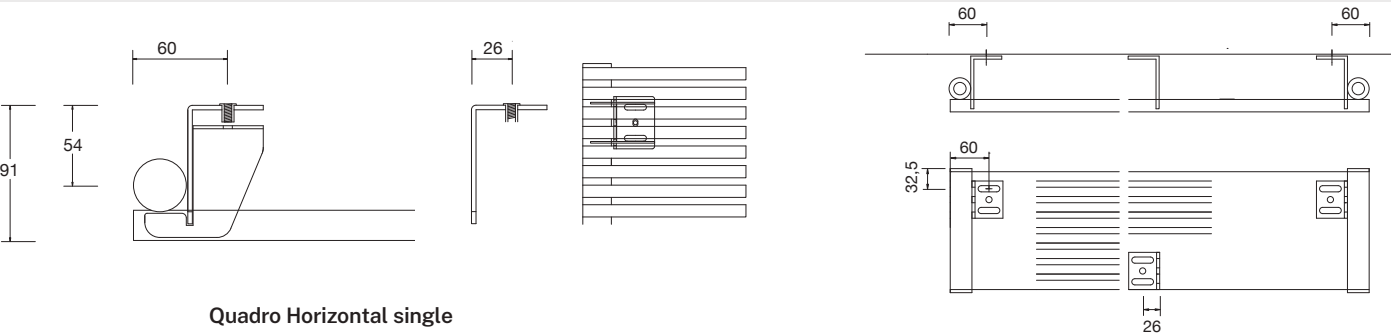

Quadro Horizontal single

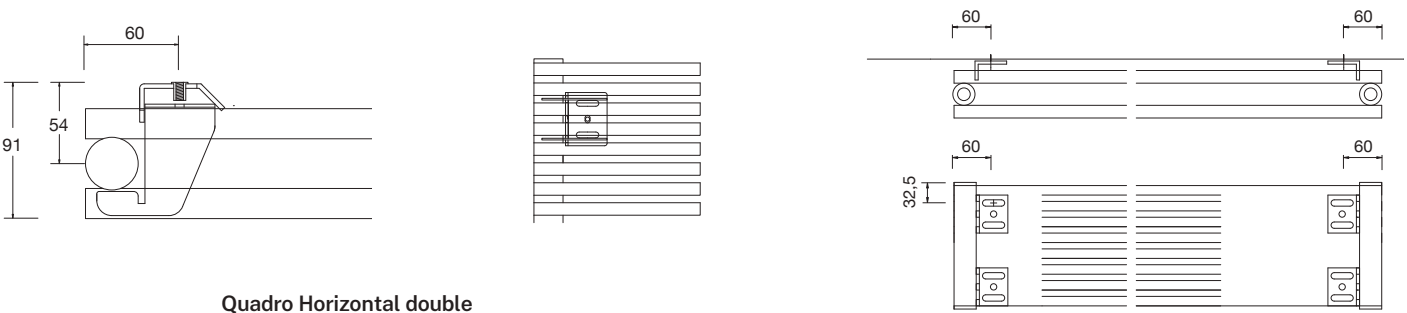

Quadro Horizontal double

OPERATING PRESSURE

Maximum operating pressure: 10 bar



Accessories:
Refer to pages 288 - 295:
ACCREK04

Brackets:
The Quadro comes standard
with wall brackets in the color
of the radiator.

Colors:
The white price applies to RAL 9016. The color
price applies to the colors from the color
palette and color chart, section:

Height 248mm

																	
M	QH10		QH10-2		QH12		QH12-2										
H	248 mm		248 mm		296 mm		296 mm										
D	55 mm		74 mm		55 mm		74 mm										
C	2,6 L/m.		4,82 L/m.		3,12 L/m.		5,78 L/m.										
R	25%		25%		25%		25%										
Ex n	1,33		1,38		1,33		1,38										
M = Model			H = Height			D = Depth			C = Capacity			R = Radiation share			Ex n = Exponent n		
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20							
600	114	223	191	384	136	267	230	461									
800	151	297	255	512	181	356	306	614									
1000	189	371	319	640	227	445	382	768									
1200	227	445	382	768	272	534	459	922									
1600	302	594	510	1024	362	712	612	1229									
1800	340	668	574	1152	408	801	688	1382									
2000	378	742	637	1280	453	890	765	1536									

Height 344mm

												
M	QH14		QH14-2		QH16		QH16-2					
H	344 mm		344 mm		392 mm		392 mm					
D	55 mm		74 mm		55 mm		74 mm					
C	3,64 L/m.		6,75 L/m.		4,16 L/m.		7,71 L/m.					
R	25%		25%		25%		25%					
Ex n	1,33		1,38		1,33		1,38					
M = Model			H = Height		D = Depth		C = Capacity		R = Radiation share		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20				
600	158	311	263	528	181	356	301	604				
800	211	415	351	704	242	475	401	805				
1000	264	519	438	880	302	594	501	1006				
1200	317	623	526	1056	363	713	601	1207				
1600	422	830	701	1408	484	950	802	1610				
1800	475	934	789	1584	544	1069	902	1811				
2000	528	1038	876	1760	605	1188	1002	2012				

Connections
Please note! Always specify when
placing an order. See description
on page 82.

