



FRONT VIEW AND SIDE VIEW OF TEV

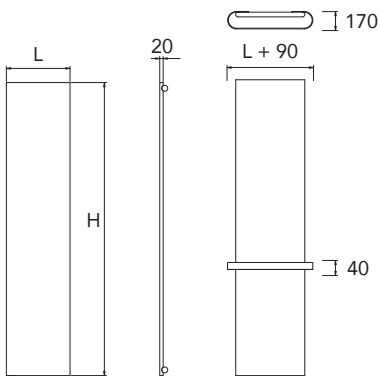


FIXING

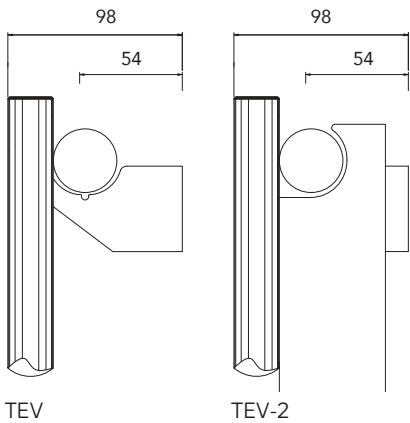


TEV CONNECTION POSITIONS

The TEV type comes with 4 standard 1/2" connections. These 4 connections can be used as follows:



In addition, there are some special connections available for the TEV type, for which an additional cost applies.

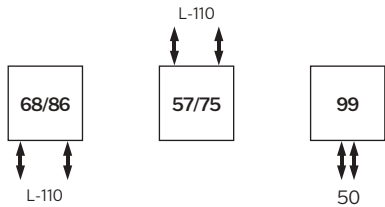

OPERATING PRESSURE

Maximum operating pressure: 10 bar

M	TEV100	TEV100-2	TEV120	TEV120-2
H	1030	1030	1230	1230
D	98	98	98	98
Ex n	1,29	1,29	1,29	1,29

M = Model			H = Height in mm		D = Depth in mm		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
398 (40)	200	387	347	669	237	457	405	781
542 (55)	281	542	486	938	332	640	567	1094
686 (70)	361	696	622	1201	426	822	725	1400

M	TEV150	TEV150-2	TEV170	TEV170-2
H	1530	1530	1730	1730
D	98	98	98	98
Ex n	1,29	1,29	1,29	1,29

M = Model			H = Height in mm		D = Depth in mm		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
398 (40)	283	546	488	943	308	595	542	1047
542 (55)	396	765	684	1320	431	833	760	1467
686 (70)	502	970	880	1701	555	1071	977	1886

M	TEV200	TEV200-2
H	2030	2030
D	98	98
Ex n	1,29	1,29

M = Model	H = Height in mm		D = Depth in mm		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20		
398 (40)	358	691	622	1200		
542 (55)	501	968	870	1680		
686 (70)	644	1244	1119	2160		