



Tubone – H



TYPE	HEIGHT in mm.	LENGTH in mm.	OUTPUT 55/45/20°C	OUTPUT 75/65/20°C
TH150.1	210	1500	194 W.	364 W.
TH150.2	440	1500	389 W.	728 W.
TH150.3	670	1500	583 W.	1092 W.
TH150-2.1	210	1500	290 W.	543 W.

TH170.1	210	1700	220 W.	412 W.
TH170.2	440	1700	441 W.	825 W.
TH170.3	670	1700	661 W.	1237 W.
TH170-2.1	210	1700	328 W.	615 W.

TH200.1	210	2000	259 W.	485 W.
TH200.2	440	2000	519 W.	971 W.
TH200.3	670	2000	778 W.	1456 W.
TH200-2.1	210	2000	387 W.	724 W.

OPTIONAL:

SVALVE.SW	Valve in Soft White instead chrome
SVALVE.SZ	Valve in Soft Black instead chrome

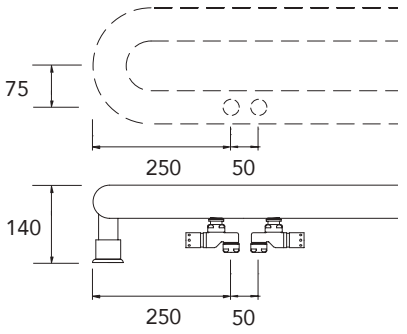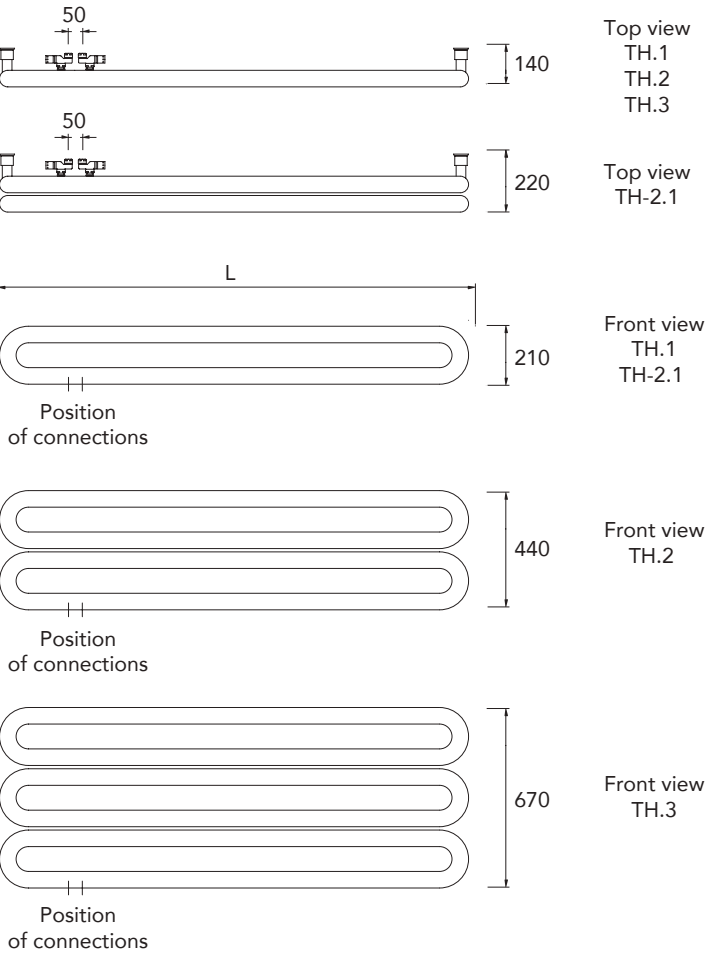

Maximum operating pressure: 6,5 bar
Exponent n: 1,23

