






MODELS




AC..2
depth 72mm



AC..3
depth 133mm




AC..4
depth 194mm





AC..5
depth 255mm






CONNECTION POSITIONS (always specify when ordering)





Only for AC073 - AC075 at connections 12 and 34.
For AC072, only 3/8" is possible.

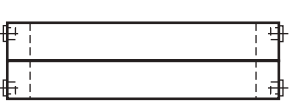

All other models.

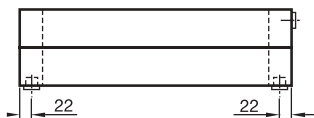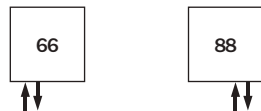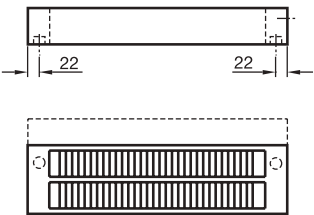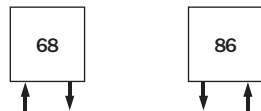

Not available for the AC..2 models.

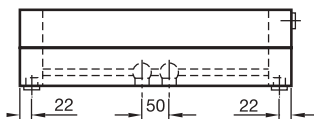

The maximum length of the radiator is 2 meters.

The connections for inlet, outlet, and air vent are 1/2". Other connection sizes are available upon request. The radiator does not come standard with a drain connection. However, if desired, the drain connection can be ordered along with the radiator at no additional cost.

HUB-TO-WALL DISTANCE

Other models

Model	Supply/return
AC..2	≥76
AC..3	≥76
AC..4	≥76
AC..5	≥76

Only for models AC072 - AC075
for connection positions 12 and 34.



Model	Supply	Return
AC072	76	76
AC073	137	76
AC074	198	76
AC075	259	76

BUILD-IN VALVE

The PLINT AC can be equipped with a built-in thermostatic valve starting from a height of 140 mm. The valve is located on the left or right side of the radiator and comes with a standard M30x1.5 coupling. Please note that the thermostat head is not included in the delivery. The radiator does not have Kv pre-adjustment and should be connected between the last and second-to-last plate.

NOTE! Specify left or right side.

Left: INB.LAC
Right: INB.RAC

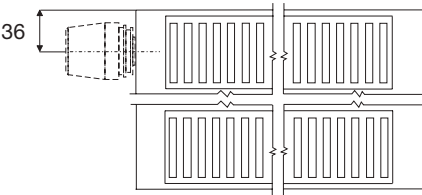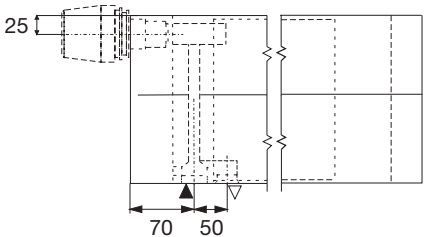

FIXING (need to ordered seperately)

Wall brackets

TYPE	RADIATOR LENGTH FROM TO	NUMBER CONSOLES	MOUNTING
AC..2 / AC..3	500mm - 1300mm	2 UNIAC	
	1400mm - 2000mm	3 UNIAC	
	2200mm - 2800mm	4 UNIAC	
	3000mm - 3400mm	5 UNIAC	
	3600mm - 4000mm	6 UNIAC	
AC..4 / AC..5	500mm - 800mm	2 UNIAC	
	900mm - 1300mm	3 UNIAC	
	1400mm - 1700mm	4 UNIAC	
	1800mm - 2200mm	5 UNIAC	
	2400mm - 2600mm	6 UNIAC	
	2800mm - 3000mm	7 UNIAC	
	3200mm - 3400mm	8 UNIAC	
	3600mm - 3800mm	9 UNIAC	
	4000mm	10 UNIAC	

Universele console UNIAC
Can be used as a wall or floor bracket.
Length/height: 350mm, can be shortened.
UNIACW Standard white
UNIACK Other colors

Stand brackets

TYPE	RADIATOR LENGTH FROM TO	NUMBER CONSOLES	MOUNTING
AC..2 / AC..3	500mm - 2000mm	2 UNIAC	
	2200mm - 3600mm	3 UNIAC	
	3800mm - 4000mm	4 UNIAC	
AC..4 / AC..5	500mm - 2000mm	4 UNIAC	
	2200mm - 3600mm	6 UNIAC	
	3800mm - 4000mm	8 UNIAC	


Plastic cover plate ROZETAC
White plastic cover plate for UNIAC.
ROZETAC Standard white





Column feet

The column feet are supplied as a set of 2 or 3 feet, depending on the length of the radiator. Column feet can only be ordered in combination with the radiator. They are compatible with connections 68 and 86. One of the feet is equipped with an opening for the thermostat head measuring $\varnothing 58\text{mm}$.

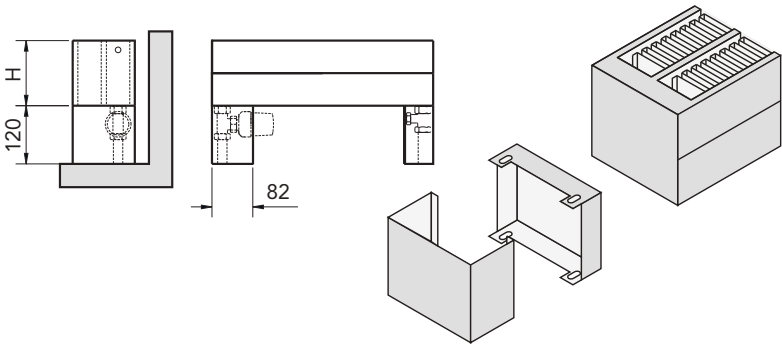

Length	
FUS2	500-2000mm
FUS3	2200-4000mm


BENCH CONSTRUCTION

The plinth radiator AC can also be configured as a bench or windowsill. Special brackets have been developed for this purpose. The brackets can be supplied in the same color as the radiator. The mounting screws are standard chrome-plated. Please note that the delivery includes only the brackets, and the seating area or windowsill needs to be provided separately.

Type	Length in m.	Under Number	Type	Above Number	Type	Confirmation Number	Type
AC073	- 2,0 2,2 - 4,0	2 3	B232	3 5	B232	2 5	B241
AC074	- 2,0 2,2 - 4,0	2 3	B235	3 5	B235	2 5	B241
AC075	- 2,0 2,2 - 4,0	2 3	B238	3 5	B238	2 5	B241
AC143	- 2,0 2,2 - 4,0	2 3	B232	3 5	B231	3 5	B242
AC144	- 2,0 2,2 - 4,0	2 3	B235	3 5	B234	3 5	B242
AC145	- 2,0 2,2 - 4,0	2 3	B238	3 5	B237	3 5	B242


Type	Length in m.	Under Number	Type	Above Number	Type	Confirmation Number	Type
AC213	- 2,0 2,2 - 4,0	2 3	B231	3 5	B231	3 5	B243
AC214	- 2,0 2,2 - 4,0	2 3	B234	3 5	B234	3 5	B243
AC215	- 2,0 2,2 - 4,0	2 3	B237	3 5	B237	3 5	B243
AC283	- 2,0 2,2 - 4,0	2 3	B231	3 5	B231	3 5	B244
AC284	- 2,0 2,2 - 4,0	2 3	B234	3 5	B234	3 5	B244
AC285	- 2,0 2,2 - 4,0	2 3	B237	3 5	B237	3 5	B244

	B231	B232	B234	B235	B237	B238
Height	110	180	110	180	110	180
Depth	131	131	192	192	253	253

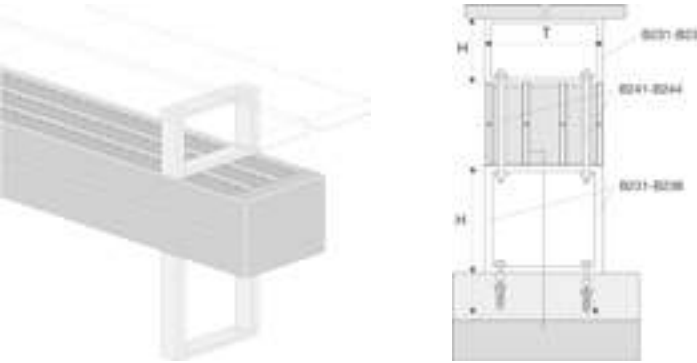

ANGLED AND CURVED DESIGNS (on request)

PLINT AC radiators are available in angled or curved designs. They are custom-made based on a dimensional sketch or a template. Prices for these variations are available upon request, provided with a dimensional sketch.

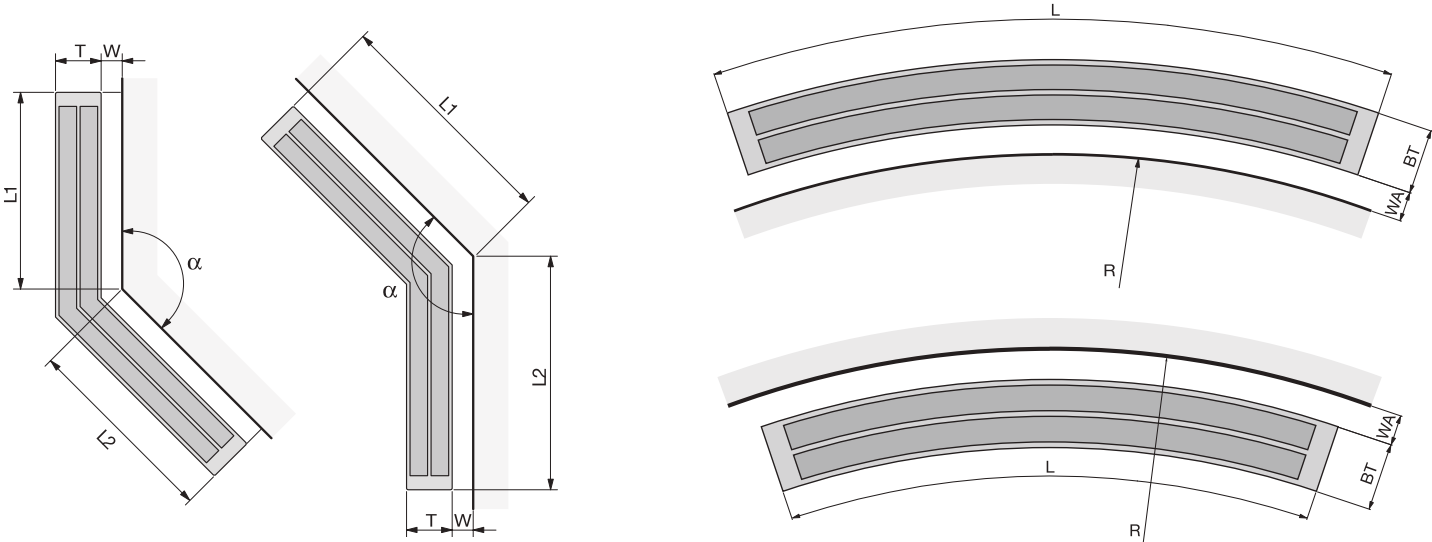

OPERATING PRESSURE





The standard operating pressure of the PLINT AC is 6 bar. Upon request, this radiator can be customized to operate at a operating pressure of 10 bar. The additional cost for a operating pressure of 10 bar is 10% of the radiator price in white color. The test pressure is 1.3 times the operating pressure.

COVER GRILLE

The the PLINT AC comes standard with a cover grille. The radiator can also be supplied without a cover grille.



Height 70mm







M	AC072	AC073	AC074	AC075
H x D	70 x 72 mm	70 x 133 mm	70 x 194 mm	70 x 255 mm
C	1,1 L/m	1,7 L/m	2,3 L/m	2,9 L/m
W	5,5 kg/m	9,1 kg/m	12,6 kg/m	16,1 kg/m
R	20%	10%	10%	10%
Ex n	1,24	1,22	1,22	1,21

M = Model		H x D = Height x Depth		C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n	
-----------	--	------------------------	--	--------------	--	------------	--	---------------------	--	-------------------	--

Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
500	93	175	160	297	219	407	278	513
600	112	209	191	356	263	488	333	615
700	130	244	223	415	307	569	389	718
800	149	279	255	474	350	650	444	820
900	167	314	287	534	394	732	500	923
1000	186	349	319	593	438	813	555	1025
1100	205	384	351	652	482	894	611	1128
1200	223	419	383	712	526	976	666	1230
1300	242	454	415	771	569	1057	722	1333
1400	260	489	447	830	613	1138	777	1435
1500	279	524	479	890	657	1220	833	1538
1600	298	558	510	949	701	1301	888	1640
1700	316	593	542	1008	745	1382	944	1743
1800	335	628	574	1067	788	1463	999	1845
1900	353	663	606	1127	832	1545	1055	1948
2000	372	698	638	1186	876	1626	1110	2050
2200	409	768	702	1305	964	1789	1221	2255
2400	446	838	766	1423	1051	1951	1332	2460
2600	484	907	829	1542	1139	2114	1443	2665
2800	521	977	893	1660	1226	2276	1554	2870
3000	558	1047	957	1779	1314	2439	1665	3075
3200	595	1117	1021	1898	1402	2602	1776	3280
3400	632	1187	1085	2016	1489	2764	1887	3485
3600	670	1256	1148	2135	1577	2927	1998	3690
3800	707	1326	1212	2253	1664	3089	2109	3895
4000	744	1396	1276	2372	1752	3252	2220	4100


Height 140mm



M	AC142	AC143	AC144	AC145
H x D	140 x 72 mm	140 x 133 mm	140 x 194 mm	140 x 255 mm
C	2,3 L/m	3,4 L/m	4,6 L/m	5,7 L/m
W	11 kg/m	18,7 kg/m	25,8 kg/m	33,7 kg/m
R	20%	10%	10%	10%
Ex n	1,3	1,29	1,29	1,29

M = Model		H x D = Height x Depth		C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n	
-----------	--	------------------------	--	--------------	--	------------	--	---------------------	--	-------------------	--

Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
500	141	272	228	439	308	593	386	743
600	169	326	274	527	370	711	463	892
700	197	380	319	615	431	830	540	1040
800	225	434	365	702	493	948	618	1189
900	253	489	410	790	554	1067	695	1337
1000	281	543	456	878	616	1185	772	1486
1100	309	597	502	966	678	1304	849	1635
1200	337	652	547	1054	739	1422	926	1783
1300	365	706	593	1141	801	1541	1004	1932
1400	393	760	638	1229	862	1659	1081	2080
1500	422	815	684	1317	924	1778	1158	2229
1600	450	869	730	1405	986	1896	1235	2378
1700	478	923	775	1493	1047	2015	1312	2526
1800	506	977	821	1580	1109	2133	1390	2675
1900	534	1032	866	1668	1170	2252	1467	2823
2000	562	1086	912	1756	1232	2370	1544	2972
2200	618	1195	1003	1932	1355	2607	1698	3269
2400	674	1303	1094	2107	1478	2844	1853	3566
2600	731	1412	1186	2283	1602	3081	2007	3864
2800	787	1520	1277	2458	1725	3318	2162	4161
3000	843	1629	1368	2634	1848	3555	2316	4458
3200	899	1738	1459	2810	1971	3792	2470	4755
3400	955	1846	1550	2985	2094	4029		
3600	1012	1955	1642	3161	2218	4266		
3800	1068	2063	1733	3336	2341	4503		
4000	1124	2172	1824	3512	2464	4740		

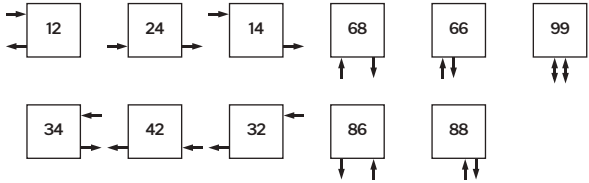

For connection 99, the maximum length is 2 meters.







Brackets and cover grills:
For a detailed description of wall brackets and floor brackets, please refer to page 181. A cover grille is included as standard.

Colors:
The white price applies to RAL 9016. The color price applies to the colors from the color palette and color chart, sector:

Connections:
PLEASE NOTE! Always specify when placing an order.
See description on page 180.

Height 210mm





				
M	AC212	AC213	AC214	AC215
H x D	210 x 72 mm	210 x 133 mm	210 x 194 mm	210 x 255 mm
C	3,4 L/m	5,2 L/m	6,9 L/m	8,6 L/m
W	16,7 kg/m	28,3 kg/m	39,7 kg/m	50,9 kg/m
R	20%	10%	10%	10%
Ex n	1,35	1,37	1,35	1,36

M = Model			H x D = Height x Depth		C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
500	174	346	281	564	414	820	525	1046				
600	209	415	337	676	496	984	629	1255				
700	244	484	393	789	579	1148	734	1464				
800	278	553	450	902	662	1312	839	1674				
900	313	622	506	1014	744	1476	944	1883				
1000	348	691	562	1127	827	1640	1049	2092				
1100	383	760	618	1240	910	1804	1154	2301				
1200	418	829	674	1352	992	1968	1259	2510				
1300	452	898	731	1465	1075	2132	1364	2720				
1400	487	967	787	1578	1158	2296	1469	2929				
1500	522	1037	843	1691	1241	2460	1574	3138				
1600	557	1106	899	1803	1323	2624	1678	3347				
1700	592	1175	955	1916	1406	2788	1783	3556				
1800	626	1244	1012	2029	1489	2952	1888	3766				
1900	661	1313	1068	2141	1571	3116	1993	3975				
2000	696	1382	1124	2254	1654	3280	2098	4184				
2200	766	1520	1236	2479	1819	3608	2308	4602				
2400	835	1658	1349	2705	1985	3936						
2600	905	1797	1461	2930	2150	4264						
2800	974	1935	1574	3156	2316	4592						
3000	1044	2073	1686	3381								
3200	1114	2211	1798	3606								
3400	1183	2349	1911	3832								
3600	1253	2488	2023	4057								
3800	1322	2626	2136	4283								
4000	1392	2764	2248	4508								


 **Brackets and cover grills:**
For a detailed description of wall brackets and floor brackets, please refer to page 181. A cover grille is included as standard.

Colors:
The white price applies to RAL 9016. The color price applies to the colors from the color palette and color chart, sector:  

Height 280mm

				
M	AC282	AC283	AC284	AC285
H x D	280 x 72 mm	280 x 133 mm	280 x 194 mm	280 x 255 mm
C	4,6 L/m	6,9 L/m	9,2 L/m	11,5 L/m
W	22,3 kg/m	37,9 kg/m	53,6 kg/m	69 kg/m
R	20%	10%	10%	10%
Ex n	1,35	1,34	1,4	1,41

M = Model			H x D = Height x Depth		C = Capacity		W = Weight		R = Radiation share		Ex n = Exponent n	
Length in mm	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20	Output 55/45/20	Output 75/65/20
500	204	405	337	682			463	942			586	1198
600	245	485	404	818			556	1130			703	1437
700	286	566	471	954			648	1319			820	1677
800	326	647	538	1090			741	1507			937	1916
900	367	728	606	1227			833	1696			1054	2156
1000	408	809	673	1363			926	1884			1171	2395
1100	449	890	740	1499			1019	2072			1288	2635
1200	490	971	808	1636			1111	2261			1405	2874
1300	530	1052	875	1772			1204	2449			1522	3114
1400	571	1133	942	1908			1296	2638			1639	3353
1500	612	1214	1010	2045			1389	2826			1757	3593
1600	653	1294	1077	2181			1482	3014			1874	3832
1700	694	1375	1144	2317			1574	3203				
1800	734	1456	1211	2453			1667	3391				
1900	775	1537	1279	2590			1759	3580				
2000	816	1618	1346	2726			1852	3768				
2200	898	1780	1481	2999								
2400	979	1942	1615	3271								
2600	1061	2103	1750	3544								
2800	1142	2265	1884	3816								
3000	1224	2427	2019	4089								
3200	1306	2589										
3400	1387	2751										
3600	1469	2912										
3800	1550	3074										
4000	1632	3236										

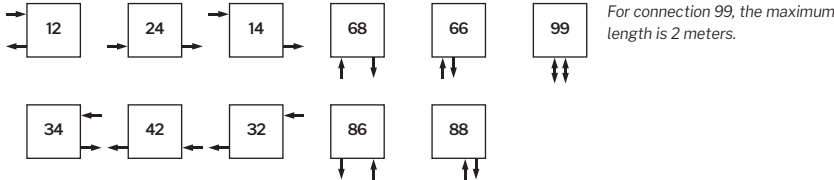

Connections:
PLEASE NOTE! Always specify when placing an order.
See description on page 180.